# INTRODUCTION PACK

**ENG** 



silentlab



# The calm where new ideas are born

Our iconic product creates an oasis of silence right in the middle of the office action. You're only a door click away from working undisturbed. Whether you need to take a business call, focus on your work, or just enjoy some privacy, our quiet zones give you absolute peace of mind while keeping you connected to everything around you.

The unique design works with works with contrasts and balances mass and space, creating harmony between the enclosed space of the meeting room and the surrounding area. Compact opposing upholstered walls surround the interior space and create a cozy, understated environment. By contrast, the glass walls in the other direction mediate contact with the surrounding space. Enjoy the solitude to focus on work without feeling disconnected from your office environment.

We place a high priority on quality of workmanship and choice of materials. Flawless craftsmanship, sophisticated details and the perfect alignment of all elements underline the simplicity and strength of the entire concept.

# **SPARK**

Acoustic room built for tough conditions

# Ů1

# 1053 mm / 41.5 in 1110 mm / 43.7 in

# **TECHNICAL DETAILS**

exterior dimensions (w × h × d) 1110 × 2226 × 930 mm / 43.7 × 87.6 × 36.6 in

interior dimensions (w × h × d) 850 × 2057 × 864 mm / 33.4 × 80.9 × 34 in

350 kg / 771 lb weight

left door opens

sound-insulating glass glass walls

solid walls sandwich panel with acoustic filling

glass wall frame beech (black varnish)

and door handle

sandwich panel with acoustic filling ceiling

carpet (anthracite grey) flooring

ventilation standard air flow: 120 m³/h

maximum air flow: 341 m<sup>3</sup>/h

LED, chromaticity temperature 4200 K lighting

electric socket (1x), ventilation, motion sensor, desk, standard equipment

LED lighting, control panel for lighting and air ventilation

optional equipment refer to the pricelist

material lines - interior decorative fabric Bombay 36

color options hyphenate steel – fine texture


cladding - exterior

certification environmental product profile

This product has an Environmental Product Declaration (EPD) prepared in accordance with ISO 14025 and the implementing standards ISO 14040, ISO 14044 and EN 15804.











Acoustic room for one-on-one meetings

## . Ω

# 2220 mm/874 in 930 mm/366 in

# **TECHNICAL DETAILS**

exterior dimensions (w × h × d)  $2220 \times 2226 \times 930$  mm /  $87.4 \times 87.6 \times 36.6$  in

interior dimensions (w  $\times$  h  $\times$  d) 1968  $\times$  2057  $\times$  864 mm / 77.5  $\times$  80.9  $\times$  34 in

weight 695 kg / 1532 lb

door opens left

glass walls sound-insulating glass

solid walls sandwich panel with acoustic filling

glass wall frame beech (black varnish)

and door handle

ceiling sandwich panel with acoustic filling

flooring carpet (anthracite grey)

ventilation standard air flow: 250 m³/h

maximum air flow: 341 m<sup>3</sup>/h

lighting LED, chromaticity temperature 4200 K

standard equipment electric socket (2x), ventilation, motion sensor,

LED lighting, control panel for lighting and air ventilation

optional equipment refer to the pricelist

material lines – interior decorative fabric Bombay 36

color options hyphenate steel – fine texture

cladding – exterior

certification CE

environmental product profile

This product has an Environmental Product
Declaration (EPD) prepared in accordance with
ISO 14025 and the implementing standards
ISO 14040, ISO 14044, and EN 15804.











Acoustic room for up to four persons

# **^**4

# **TECHNICAL DETAILS**

exterior dimensions (w  $\times$  h  $\times$  d) 2220  $\times$  2226  $\times$  1850 mm / 87.4  $\times$  87.6  $\times$  72.8 in

interior dimensions (w  $\times$  h  $\times$  d) 1968  $\times$  2057  $\times$  1770 mm / 77.5  $\times$  81  $\times$  67 in

weight 1150 kg / 2535 lb

door opens left

glass walls sound-insulating glass

solid walls sandwich panel with acoustic filling

glass wall frame beech (black varnish)

and door handle

ceiling sandwich panel with acoustic filling

flooring carpet (anthracite grey)

ventilation standard air flow: 400 m³/h

maximum air flow: 626 m<sup>3</sup>/h

lighting LED, chromaticity temperature 4200 K

standard equipment electric socket (3×), ventilation, motion sensor, LED

lighting, control panel for lighting and air ventilation

optional equipment refer to the pricelist

material lines – interior decorative fabric Bombay 36

color options hyphenate steel – fine texture

cladding – exterior


certification


environmental product profile

This product

This product has an Environmental Product Declaration (EPD) prepared in accordance with ISO 14025 and the implementing standards

ISO 14040, ISO 14044, and EN 15804.



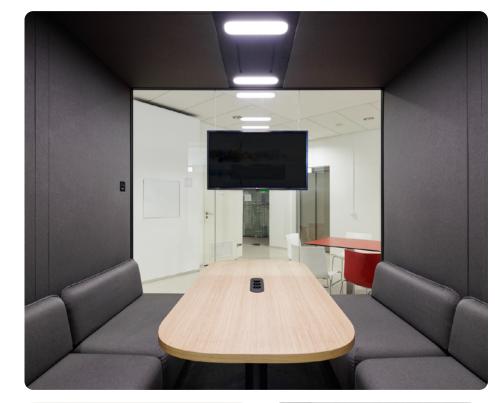









## CONTACT INFORMATION

+420 733 739 065 info@silent-lab.com www.silent-lab.com

## **COMPANY ADDRESS**

SilentLab s.r.o. Za Zastávkou 373 111 01 Prague 10 – Czech Republic

## PRODUCTION FACILITY

SilentLab s.r.o. Řípská 1181/18a 627 00 Brno-Slatina – Czech Republic

The final product configuration may differ from the versions shown in the photographs.

SilentLab® is a registered trademark.



All intellectual property rights ("Rights"), whether registered or not, relating to any content, texts, photographs, images, logos, instructions, designs, technical solutions, etc. ("Content") are the property of SilentLob s.r.o. ("Owner") and any interference with these Rights to any Content or part thereof without the prior express and written consent of the Owner is not permitted.

Any use of the Content not expressly authorized in writing in advance, with the exception of internal and non-commercial use of the unmodified Content for the purposes of the customer's own order, is considered an infringement of the Owner's Rights. In particular (not exclusively), any reproduction, change, addition, merger or other modification of the Content is prohibited without the prior express written consent of the Owner.



