INTRODUCTION PACK

CZ



silentlab



GENERAL INFORMATION

Our iconic product creates an oasis of silence right in the middle of the office action. You're only a door click away from working undisturbed. Whether you need to take a business call, focus on your work, or just enjoy some privacy, our quiet zones give you absolute peace of mind while keeping you connected to everything around you.

The unique design works with works with contrasts and balances mass and space, creating harmony between the enclosed space of the meeting room and the surrounding area. Compact opposing upholstered walls surround the interior space and create a cozy, understated environment. By contrast, the glass walls in the other direction mediate contact with the surrounding space. Enjoy the solitude to focus on work without feeling disconnected from your office environment.

We place a high priority on quality of workmanship and choice of materials. Flawless craftsmanship, sophisticated details and the perfect alignment of all elements underline the simplicity and strength of the entire concept.





SPARK

Add a spark to your working environment.

SPARK is our first acoustic meeting room with enhanced mechanical durability. However, it still retains its maximum functionality and elegant curves. It can also cope in the toughest conditions and is easy to maintain. This makes it ideal for production halls, healthcare facilities or public areas.







SPARK²

The perfect place for undisturbed online meetings even in a busy hall.

SPARK² is an extraordinary quiet zone that can accommodate two people in absolute privacy.

This beautifully designed, innovative acoustic room ensures maximum attenuation of ambient sounds and better working conditions in any noisy spaces. Another advantage is its easy-to-maintain durable surface, made of a special powder-coated steel in various color combinations.







SPARK⁴

Silence the world and enjoy comfort with SPARK4.

Discover the SPARK⁴, which will captivate you not only with its distinctive look and elegant design, but especially its wide range of technological innovations. The silent office is designed for one to four people for private meetings even in challenging conditions.











SPARK

Dimensions



exterior: 1110 × 2226 × 930 mm / 43.7 × 87.6 × 36.6 in

Sound attenuation

32 dB (class A) - ISO 23351-1:2020

Ventilation

standard air flow: 120 m³/h maximum air flow: 341 m³/h

Standard equipment

electric socket (1×), ventilation, motion sensor, desk, LED lighting, sprinkler / fire detection system provision, control panel for lighting and air ventilation

Interior – decorative fabric

Exterior – powder coated steel

PRIME



Dimensions

exterior: 1175 × 2285 × 995 mm / 46.3 × 90 × 39.5 in

Sound attenuation

31 dB (class A) - ISO 23351-1:2020

Ventilation

standard air flow: 102 m³/h maximum air flow: 322 m³/h

Standard equipment

electric socket (1x), motion sensor, desk, LED lighting, ventilation, control panel for lighting and air ventilation

Interior – decorative fabric

Exterior – decorative fabric

COMPARISON SPARK / PRIME







SPARK²

. Ω2

QUADRIO I

^2-4

Dimensions

exterior: 2220 × 2226 × 930 mm / 87.4 × 87.6 × 36.6 in

Sound attenuation

32 dB (class A) - ISO 23351-1:2020

Ventilation

standard air flow: 250 m³/h maximum air flow: 341 m³/h

Standard equipment

electric socket (2×), ventilation, motion sensor, LED lighting, sprinkler / fire detection system provision, control panel for lighting and air ventilation

Interior – decorative fabric
Exterior – powder coated steel

Dimensions

exterior: 2520 × 2285 × 1317 mm / 99.2 × 90 × 51.9 in

Sound attenuation

29 dB (class B) - ISO 23351-1:2020

Ventilation

standard air flow: 292 m³/h maximum air flow: 492 m³/h

Standard equipment

electric socket (2×), motion sensor, LED lighting, ventilation, control panel for lighting and air ventilation

Interior – decorative fabric **Exterior** – decorative fabric

COMPARISON SPARK² / QUADRIO I







COMPARISON SPARK⁴ / QUADRIO II

SPARK⁴

\hat{1}2-4

QUADRIO II

^2-5

Dimensions

exterior: 2220 × 2226 × 1850 mm/ 87.4 × 87.6 × 72.8 in

Sound attenuation

32 dB (class A) - ISO 23351-1:2020

Ventilation

standard air flow: 400 m³/h maximum air flow: 626 m³/h

Standard equipment

electric socket (3×), ventilation, motion sensor, LED lighting, sprinkler / fire detection system provision, control panel for lighting and air ventilation

Interior – decorative fabric

Exterior – powder coated steel

QOADI 110

Dimensions

exterior: 2522 × 2285 × 1944 mm/ 99.2 × 90 × 76.5 in

Sound attenuation

30 dB (class A) - ISO 23351-1:2020

Ventilation

standard air flow: 347 m³/h maximum air flow: 492 m³/h

Standard equipment

electric socket (3×), motion sensor, LED lighting, ventilation, control panel for lighting and air ventilation

Interior – decorative fabric **Exterior** – decorative fabric





Technical details

exterior dimensions (w × h × d) interior dimensions (w × h × d)

weight

door dimensions door opening clear dimensions $1110 \times 2226 \times 930 \text{ mm} / 43.7 \times 87.6 \times 36.6 \text{ in}$ $850 \times 2057 \times 864 \text{ mm} / 33.4 \times 80.9 \times 34 \text{ in}$

350 kg / 771 lb

918 × 2075 mm / 36.1 × 81.7 in $908 \times 2055 \, \text{mm} / 35.7 \times 80.9 \, \text{in}$

door opens left

sound-insulating glass glass doors glass walls sound-insulating glass solid walls

sound-absorbing sandwich panel

sound-absorbing sandwich panel ceiling flooring sound-absorbing sandwich panel,

carpet (anthracite grey)

glass wall frame

and door handle

beech (black varnish)

sound attenuation speech level reduction Ds,a = 32 dB (class A)*1

ventilation standard air flow: 120 m³/h

maximum air flow: 341 m³/h

lighting LED, chromaticity temperature 4200 K

energy in operation*2 45 W

in standby 1W

220-240 V, 50/60 Hz, 10 A power

 $660 \times 320 \times 27 \,\text{mm} / 23.6 \times 12.6 \times 1 \,\text{in}$ desk

> height 1053 mm - standing option, table in the middle of the wall, oak wood

standard equipment electric socket (1x), ventilation, motion sensor, LED

lighting control, sprinkler / fire detection system provision,

panel for lighting and air ventilation

optional equipment refer to the pricelist

color options of

material lines - interior

decorative fabric Bombay 36 *3



color options of

cladding - exterior

powder coated steel - fine texture
















carbon

certification



SPARK

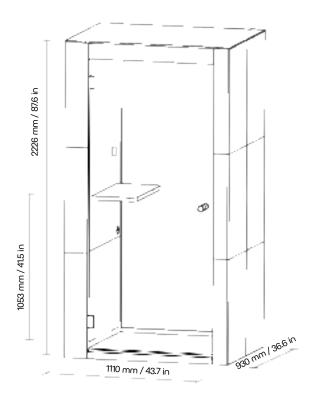

ISO 23351-1:2020 - Acoustics — Measurement of speech level reduction of furniture ensembles and enclosures — Part 1: Laboratory method.

Consumption without attached appliances.

Product specifications apply when using standard materials. To ensure optimal performance, the product is designed to work with carefully selected and tested materials. Using materials not specified in the SilentLab material selection may affect acoustic properties and functionality.

Technical details

exterior dimensions (w × h × d) interior dimensions (w × h × d)

weight

door dimensions door opening clear dimensions 2220 × 2226 × 930 mm / 87.4 × 87.6 × 36.6 in 1968 × 2057 × 864 mm / 77.5 × 80.9 × 34 in

695 kg / 1532 lb

853 × 2075 mm / 33.6 × 81.7 in 820 × 2055 mm / 32.3 × 80.9 in

door opens left

sound-insulating glass glass doors sound-insulating glass glass walls solid walls

sound-absorbing sandwich panel

sound-absorbing sandwich panel ceiling

flooring sound-absorbing sandwich panel,

carpet (anthracite grey)

glass wall frame and door handle beech (black varnish)

speech level reduction Ds,a = 32 dB (class A)*1 sound attenuation

standard air flow: 250 m³/h ventilation

maximum air flow: 341 m³/h

lighting LED, chromaticity temperature 4200 K

energy in operation*2 66 W

in standby 1,5 W

220-240 V, 50/60 Hz, 10 A power

640 × 480 × 20 mm / 25.2 × 18.9 × 0.8 in, desk

> height 735 mm, oak wood

electric socket (2x), ventilation, motion sensor, standard equipment

yellow

LED lighting control, sprinkler / fire detection system provision, panel for lighting and air ventilation

optional equipment refer to the pricelist

color options of material lines - interior and seating decorative fabric Bombay 36 *3




color options of cladding - exterior powder coated steel - fine texture



C€ certification



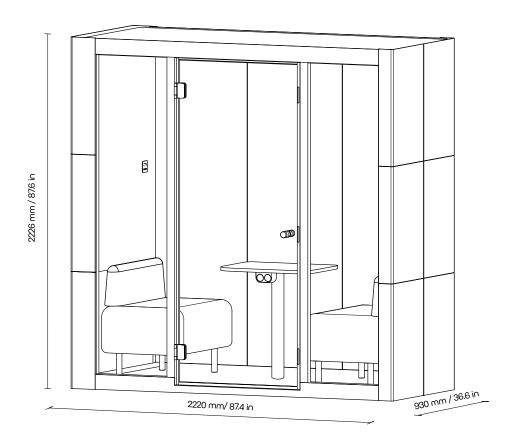

ISO 23351-1:2020 - Acoustics — Measurement of speech level reduction of furniture ensembles and enclosures — Part 1: Laboratory method.

Consumption without attached appliances.

Product specifications apply when using standard materials. To ensure optimal performance, the product is designed to work with carefully selected and tested materials. Using materials not specified in the SilentLab material selection may affect acoustic properties and functionality.

Technical details

exterior dimensions (w x h x d) ininterior dimensions (w × h × d)

weight

solid walls

door dimensions door opening clear dimensions

2220 × 2226 × 1850 mm / 87.4 × 87.6 × 72.8 in 1968 × 2057 × 1770 mm / 77.5 × 81 × 67 in

1150 kg / 2535 lb

853 × 2075 mm / 33.6 × 81.7 in 820 × 2055 mm / 32.3 × 80.9 in

door opens left

sound-insulating glass glass doors sound-insulating glass glass walls

sound-absorbing sandwich panel

sound-absorbing sandwich panel ceiling

flooring sound-absorbing sandwich panel,

carpet (anthracite grey)

glass wall frame and door handle beech (black varnish)

speech level reduction Ds,a = 32 dB (class A)*1 sound attenuation

standard air flow: 400 m³/h ventilation

maximum air flow: 626 m³/h

lighting LED, chromaticity temperature 4200 K

energy consumption in operation*2 100 W

consumption in standby 1,5 W

220-240 V, 50/60 Hz, 10 A power

 $680 \times 1320 \times 25 \text{ mm} / 26.7 \times 52 \times 1 \text{ in,}$ desk

height 720 mm / 28.2 in

veneer oak

electric socket (3x), ventilation, motion sensor, standard equipment

> LED lighting control, sprinkler / fire detection system provision, panel for lighting and air ventilation

optional equipment refer to the pricelist

color options of

material lines - interior and seating


decorative fabric Bombay 36 *3

color options of cladding - exterior powder coated steel - fine texture



certification



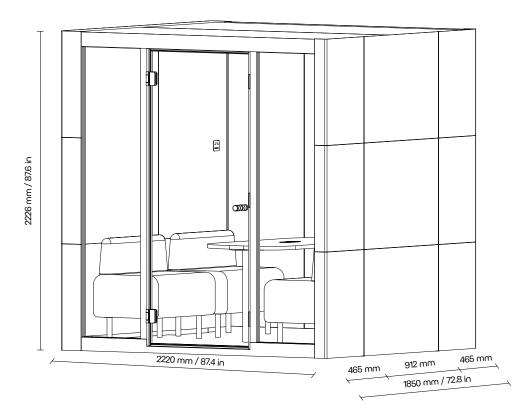

ISO 23351-1:2020 - Acoustics — Measurement of speech level reduction of furniture ensembles and enclosures — Part 1: Laboratory method.

Consumption without attached appliances.

Product specifications apply when using standard materials. To ensure optimal performance, the product is designed to work with carefully selected and tested materials. Using materials not specified in the SilentLab material selection may affect acoustic properties and functionality.



CONTACT INFORMATION

+420 733 739 065 info@silent-lab.com www.silent-lab.com

COMPANY ADDRESS

SilentLab s.r.o. Za Zastávkou 373 111 01 Prague 10 – Czech Republic

PRODUCTION FACILITY

SilentLab s.r.o. Řípská 1181/18a 627 00 Brno-Slatina – Czech Republic

The final product configuration may differ from the versions shown in the photographs.

All SPARK products are patented. SilentLab® is registred trademark.



All intellectual property rights ("Rights"), whether registered or not, relating to any content, texts, photographs, images, logos, instructions, designs, technical solutions, etc. ("Content") are the property of SilentLab s.r.o. ("Owner") and any interference with these Rights to any Content or part there of without the prior express and written consent of the Owner is not permitted.

Any use of the Content not expressly authorized in writing in advance, with the exception of internal and non-commercial use of the unmodified Content for the purposes of the customer's own order, is considered an infringement of the Owner's Rights. In particular (not exclusively), any reproduction, change, addition, merger or other modification of the Content is prohibited without the prior express written consent of the Owner.





